

## DIGITAL INDOOR CLOCK

# ECO-SLH-DC

*The ECO-SLH-DC is optimally suited for use in operating rooms, clean room environments, chemical plants, labs, swimming and fitness centres, as well as in the food and beverage industry, canteen, kitchens, etc.*



---

# FEATURES

---

## DISPLAY

---

- continuous display of time, date, temperature or stopwatch
- alternating display of time, date, calendar week, temperature, humidity, and atmospheric pressure, with customizable intervals from 0-60 seconds for each display
- manual or sensor-controlled automatic display brightness adjustment
- wide viewing angle (160°)

### Time

- 12/24 hour cycle
- with or without leading zero
- AM/PM indication for 12 hour cycle

### Date

- with or without leading zero

### Temperature

- in °C or °F

## HOUSING

---

- clock frame made of stainless steel (AISI 304, brushed)
- anti-reflection front cover made of polycarbonate, including a filter layer for optimal readability
- single-sided flush mounting
- back cover on request

## STOPWATCH

---

- counting up from zero, up to 24 hours
- counting down from a predefined time value, with stop at zero, automatic restart from predefined time or counting into negative values
- display of intermediate time values, display "freeze"
- counting in steps of 1 day, 1 minute, 1 second
- or 1/100 seconds
- possibility to connect another display unit
- possibility of parallel switching over into the time and date or temperature display mode

## CONFIGURATION

---

- setting of the clock parameters, as well as time, date, and stopwatch control by means of IR remote controller; stopwatch can additionally be controlled via big red button

## SYNCHRONIZATION

---

- autonomous operation with internal quartz base
- accuracy  $\pm 0.1$  s/day at constant temperature – software trimming
- possibility to configure any time zone
- NTP multicast or unicast synchronization, powered over Ethernet (PoE) or mains
- MOBATIME serial code, MOBALine, impulse line, DCF or IRIG-B, mains powered
- RTC backup by means of supercapacitor (lithium battery on request)

## NETWORK

---

- IPv4 and IPv6 support
- DHCPv4, DHCPv6 / manual configuration of the clock parameters or configuration via web interface
- DHCPv4, DHCPv6 private strings allow easy configuration of clock parameters when connected to LAN

# ORDER KEY

## 1 FORMAT

Digit height	10:08	10:08 <sup>25</sup>	10:08:25	Reading distance
57 mm	57.4	57.6	57x.6	25–30 m
57 mm two lines	57.4.2	57.6.2	57x.6.2	25–30 m
100 mm	100.4	100.6	100x.6	40–60 m

## 2 DISPLAY COLOR



## 3 SYNCHRONIZATION

CODE	SYNCHRONIZATION	POWER SUPPLY
NTP	NTP	Mains
PoE	NTP	PoE
WiFi	WiFi (2.4 GHz), NTP	Mains
WiFi5	WiFi (2.4/5.0 GHz), NTP	Mains
LGC	MOBALine / DCF / IRIG-B / (un)polarized 24 VDC pulses	Mains

## 4 OPTIONS

CODE	OPTION
RS485	RS-485 interface
VDC	Power supply via 18–56 VDC
BAT	Lithium battery
REL	Internal relay
REL-IP	Internal relay with firmware for switching functions
RP	Redundant power supply (PoE + 24 VDC)
SL	SMD diode display

## 5 ACCESSORIES

CODE	OPTION
IR	infrared remote control
AD 650	DCF77 radio signal receiver
GNSS 4500	GNSS receiver including antenna
SK	keyboard for stopwatch control, 5m cable
SKH	stainless steel keyboard for clock and stopwatch control, 5m cable, handheld
SKF	stainless steel keyboard for clock and stopwatch control, flush mounting
SKW	stainless steel keyboard for clock and stopwatch control, wall mounting
TP 3m	temperature sensor, IP 66, 3m cable
TP 30m	temperature sensor, IP 66, 30m cable
TPH 1m	temperature and humidity sensor, IP 66, 1m cable
BRB10	big red button for stopwatch control
CB	Code Blue signal receiver, AC/DC input range 7–350 V

## ORDER CODE

ECO-SLH-DC . **1** . **2** .N.F. **3** . **4** . **5**


Example: ECO-SLH-DC.100x.6.R.N.F.NTP.SL

# TECHNICAL DATA

ECO-SLH-DC		57.4	57.6	57x.6	100.4	100.6	100x.6
Digit height (mm)		57	57/38	57	100	100/57	100
Display features		Time display in 12-hour or 24-hour format Alternating display of time, date and temperature <sup>1</sup> (in C° or F°), air pressure <sup>1</sup> and humidity <sup>1</sup> Automatic or manual display brightness adjustment Stopwatch (count up to 24 hours, countdown from set value, display of time intervals, freezing of display...) Stopwatch operation via push buttons, IR remote control					
Material		Housing: stainless steel V2A Cover glass: anti-reflective polycarbonate					
Power supply		Standard: 100 – 240 VAC, 50 – 60 Hz VDC (option, not for PoE version): 24 VDC PoE version: PoE (IEEE 802.3af class 0)					
Power consumption (VA)	Mains	7 (2L: 11)	8 (2L: 16)	8 (2L: 16)	7	8	10
	PoE	7 (2L: 11)	8 (2L: 15)	8 (2L: 15)	7	8	10
Quartz accuracy at 20 °C		± 0.1 seconds/day without synchronization (after 24 hours of synchronization at constant temperature)					
RTC backup/ quartz-based time maintenance	Mains power supply	from lithium battery: > 2 years (without power supply) / > 6 years (with power supply)					
	PoE power supply	no time maintenance					
Temperature precision		-25 to +85 °C: ±0.5 °C, -50 to +125 °C: ±2.0 °C					
Operating conditions		-5 to +55 °C (0 to 95% relative humidity, non-condensing)					
Degree of protection		IP 54					
Standards		2002/96/EC / 2011/65/EU / 2014/30/EU / 2014/35/EU / EN 50121-4 / EN 55022 / EN 55024 / EN 60950-1					
Weight (kg)		2.6 (2L: 4)	3.3 (2L: 5)	3.5 (2L: 5.5)	4.7	5.8	6.5
Dimensions (in mm, see below)	A	380	470	500	555	695	770
	B	150 (2L: 260)				220	

2L = two lines

<sup>1</sup> only with external temperature sensor

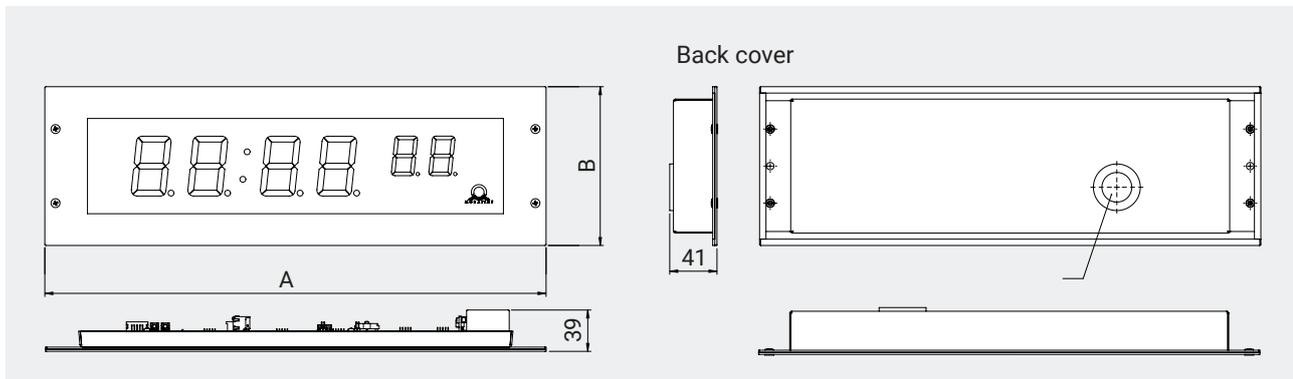

LE-801316.21 / 2023

*Have questions?  
We are happy to help.*

Moser-Baer AG | Spitalstrasse 7 | CH-3454 Sumiswald  
Tel. 034 432 46 46 | Fax 034 432 46 99  
info@mobatime.com | www.mobatime.com

